

100GB BREAKOUT PANELS



Greater capacity. Greater density.

Smaller Footprint.



Space Saving, Cost Saving

High Density MPO Breakout Panels for 100GB applications compactly interconnect network hardware, reducing the footprint of the system. Panels can be located in the same rack as the switches or closer to the network elements, eliminating additional connections.



Be Connected Faster

Our preterminated MPO assemblies give you high fiber count distribution in a small form assembly. Get the fastest bandwidth and greater connectivity in half the space.




Simple, Efficient Management

Our High Capacity Horizontal Fiber Manager simplifies your high performance cable routing in a finished, professional manner. This solution provides increased cable capacity in less rack space.

100GB BREAKOUT PANELS

The high density design of our 100GB panels logically groups the ports in 20 (100GB) LC ports, and is available for Single or Multimode applications. All breakout panels are 100% tested to Telcordia standards, serialized and shipped with test data.

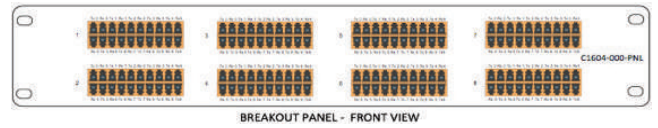


- High density format provides 160 ports / 80 duplex in 2 RU (3.5")
- Rear facing inputs for 8 MTP/MPO connections with integrated cable management
- Singlemode or Multimode with color coded adapters


MTP FIBER CABLES



APPLICATION	INDOOR	CONNECTORS, SIDE A	MTP ELITE FEMALE
FIBER TYPE	MULTIMODE OM3	CONNECTORS, SIDE B	MTP ELITE FEMALE
CABLE TYPE	MICRO DISTRIBUTION 24CT MPO	BOOT STYLE	MINI
FIBER COUNT	24	BOOT COLOR	STANDARD
RATING	OFNR (RISER)	CABLE LENGTH	10 FEET
DUPLEX CLIPS	N/A	POLARITY	MTP STRAIGHT
CABLE COLOR	AQUA	PULLING EYE	NONE

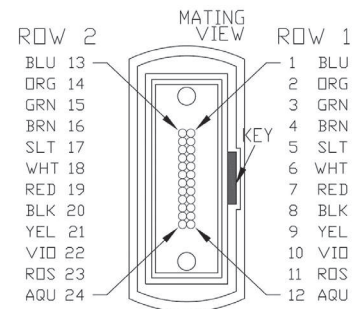

HIGH CAPACITY HORIZONTAL FIBER MANAGER

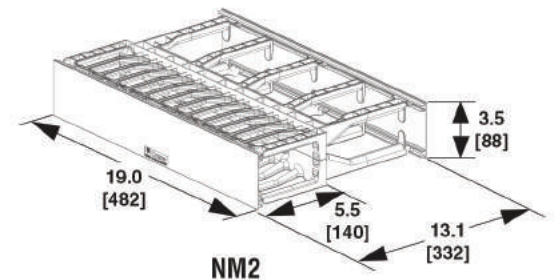

This high capacity horizontal cable manager is capable of managing high performance cable on the front and rear of any 19" EIA rack. Molded plastic with bend radius fingers to protect the cable, the fingers are inset towards the rack to allow easy access to patch cords and terminations. Standard pass through holes incorporate bend radius control. Dual hinged covers allow access to the cable pathway.

DIMENSIONS: 3.5"H x 19"W x 13.1"D (88mm x 482mm x 332mm)

